The XENONnT Neutron Veto: Performance in the Gd-doped phase

Virginia Mazza
INFN | Università di Bologna

Dark Matter

% IN UNIVERSE

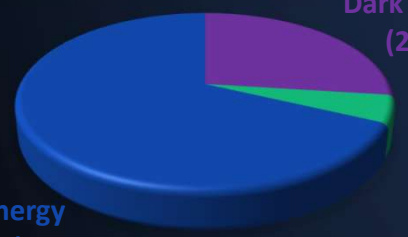

Evidences

Astronomical and Cosmological

Galactic Rotation Curve | Large Scale Structure | CMB | Gravitational Lensing | Bullet Cluster

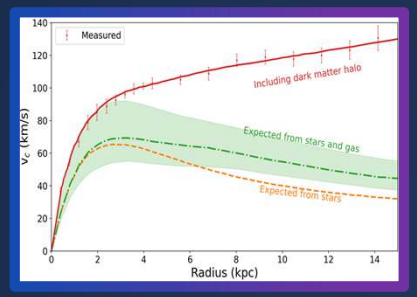

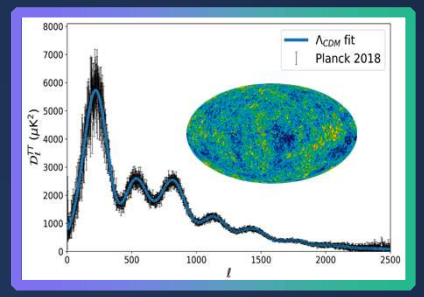

Candidates

Sterile Neutrinos | Axions | Weakly Interacting Massive Particles (WIMPs) | Light Dark Matter (SubGeV DM) | Dark Photon

XENONnT experiment

The XENON Dark Matter project aims at the DIRECT DETECTION of dark matter with Liquid Xenon deep underground at the INFN Laboratori Nazionali del Gran Sasso, Italy. Its last phase, XENONnT, is operational since 2020, with 6 t of LXe inside the TPC.

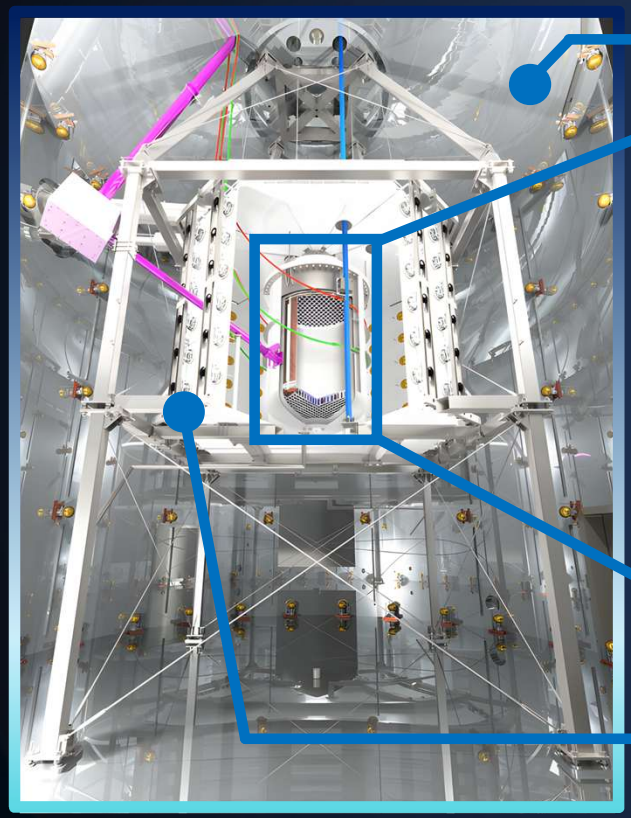

Dual Phase LXe TPC

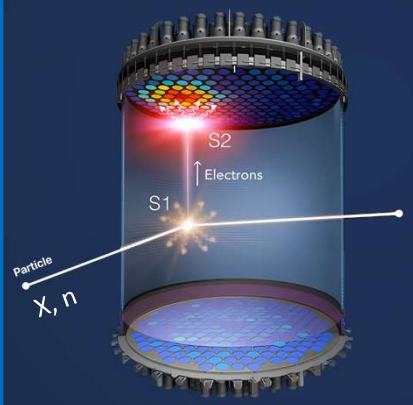

Muon Veto

Neutron Veto

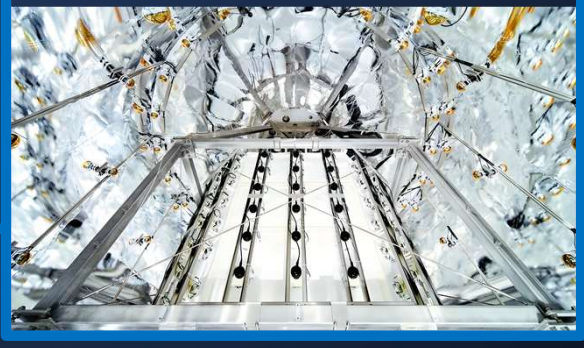

Dark Matter

XENONnT

Sim&Analysis

XENON

Neutron Veto

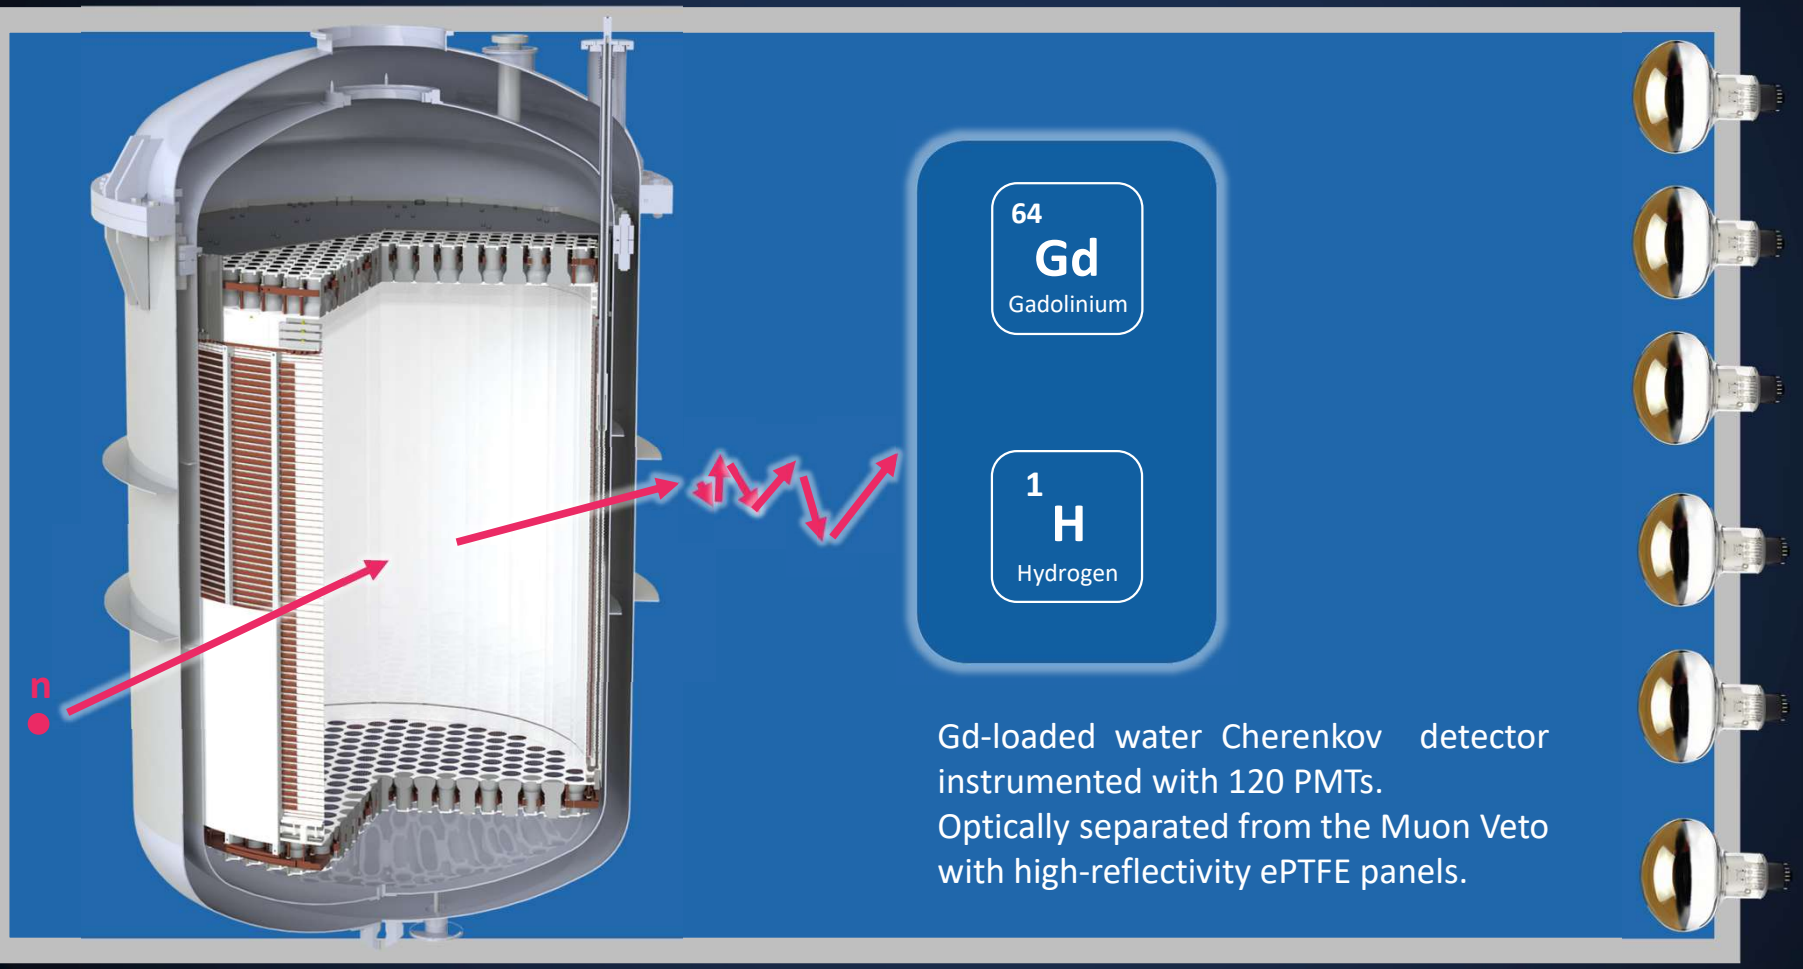

Gd-loaded water Cherenkov detector instrumented with 120 PMTs.
Optically separated from the Muon Veto with high-reflectivity ePTFE panels.

Neutron Veto working principle

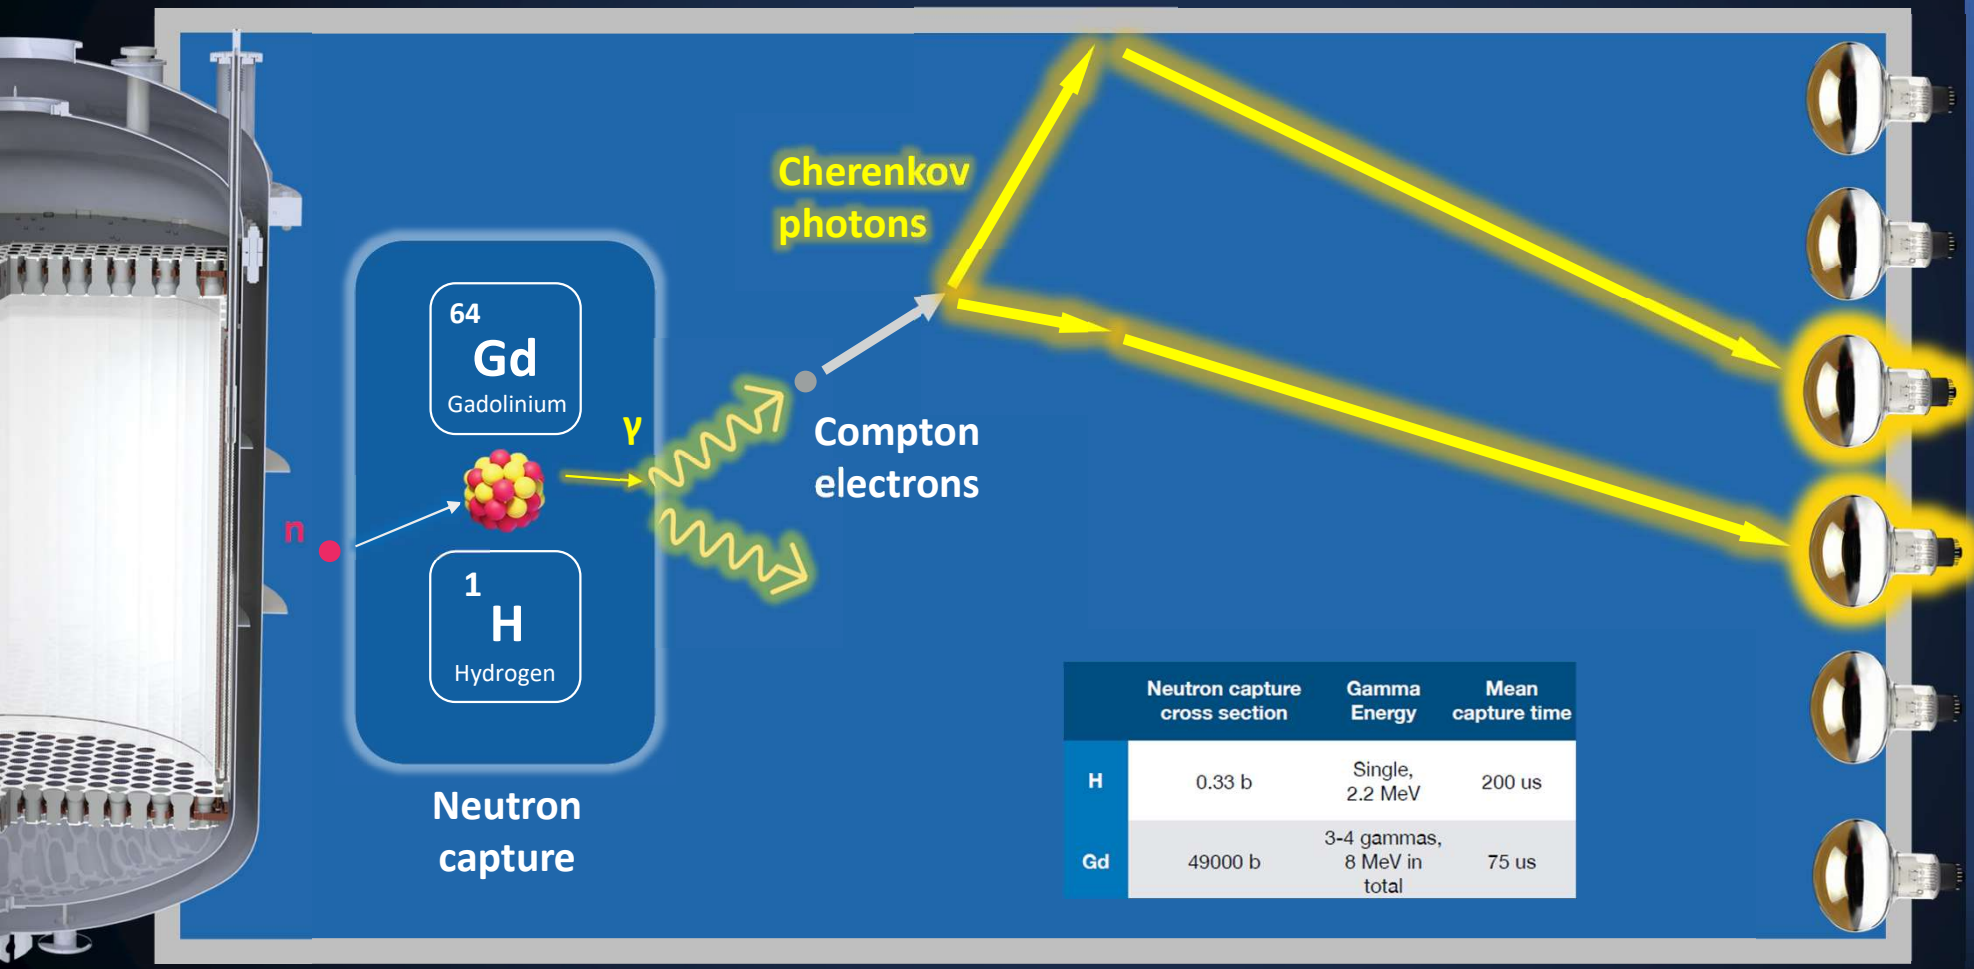

	Neutron capture cross section	Gamma Energy	Mean capture time
H	0.33 b	Single, 2.2 MeV	200 us
Gd	49000 b	3-4 gammas, 8 MeV in total	75 us

Dark Matter

XENONnT

Sim&Analysis

XENONnT modelization

GEANT4 & HitSim

GEANT4 is a toolkit used to simulate the propagation of a particle “step-by-step”, taking into account all the possible interactions with materials and fields.

Geant4 modelization

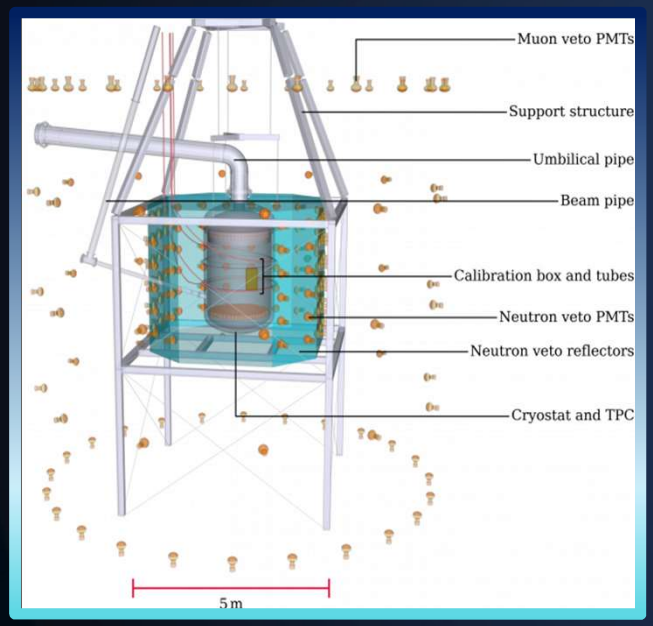

Hitlet Simulator working principle

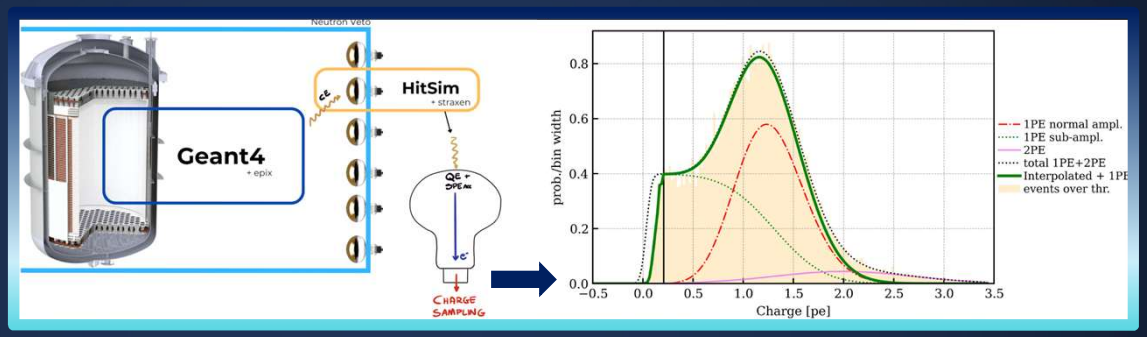

The HitSim is designed as a fast and efficient simulator for generating NV hitlets and events. Simulated signals include charge and time information analogously to real data: charge sampling follows the SPE model developed based on PMT calibration data.

Position profiles of n-capture processes

Event display in Geant4

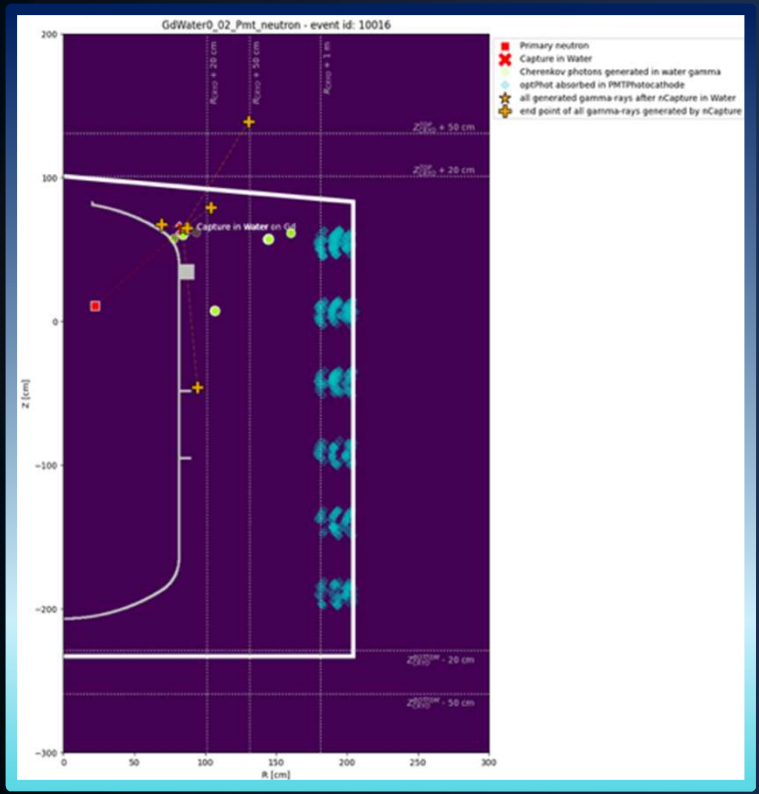

Neutron capture position & Gamma end-point (AmBe)

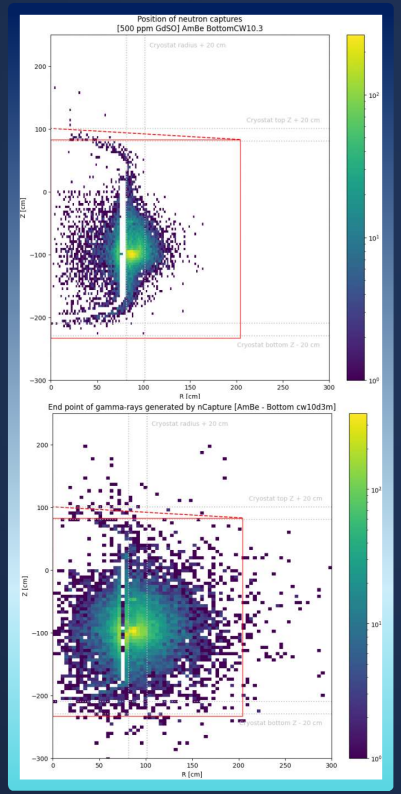

Background neutrons from cryostat

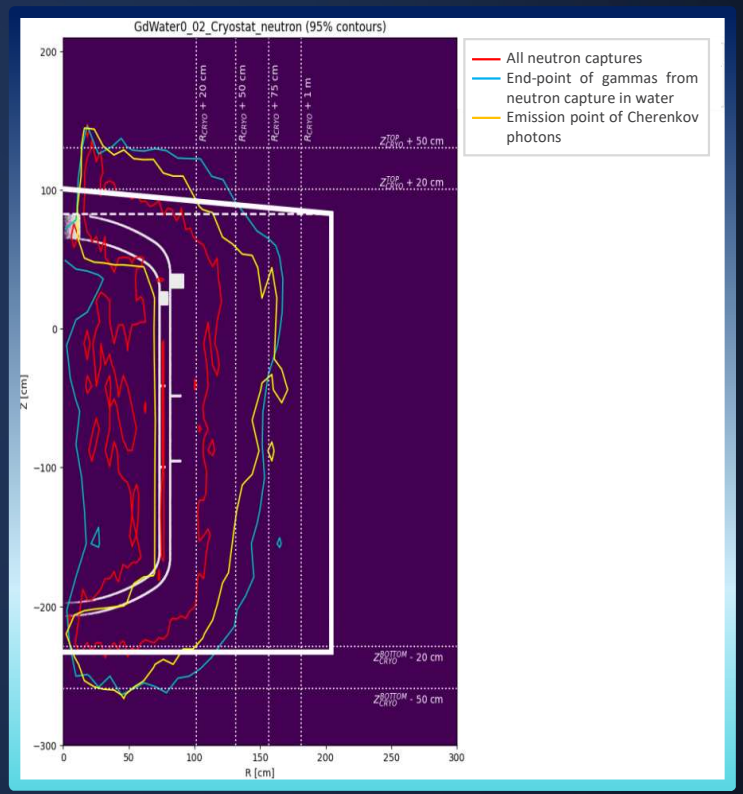

Dark Matter

XENONnT

Sim&Analysis

XENON

Calibration of the Neutron Veto

AmBe source

AmBe source emits neutrons through α-capture reaction $^{9}Be(\alpha, n)^{12}C$: its key feature is the emission of a 4.4 MeV gamma together with a neutron in about 50% of cases.

Calibration method

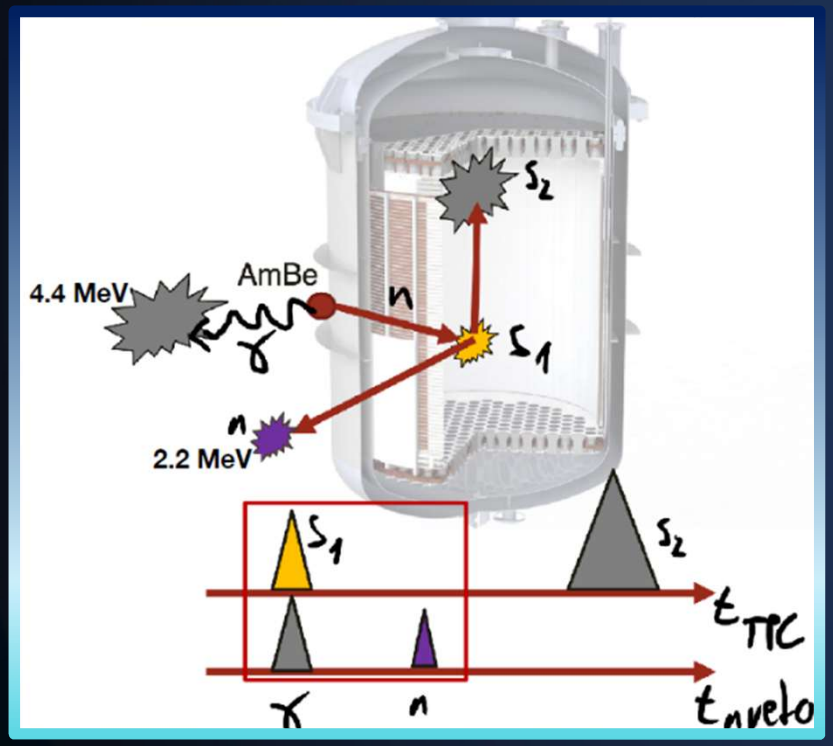

Calibration positions

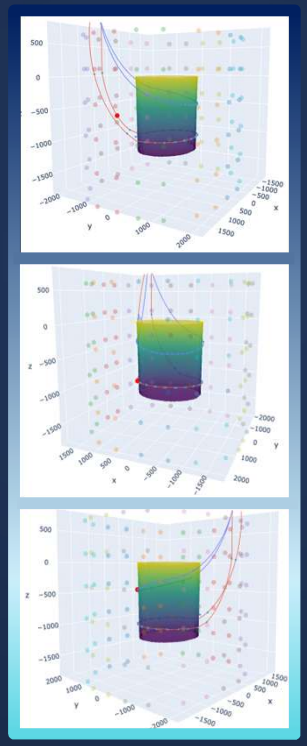

Emission energy spectra

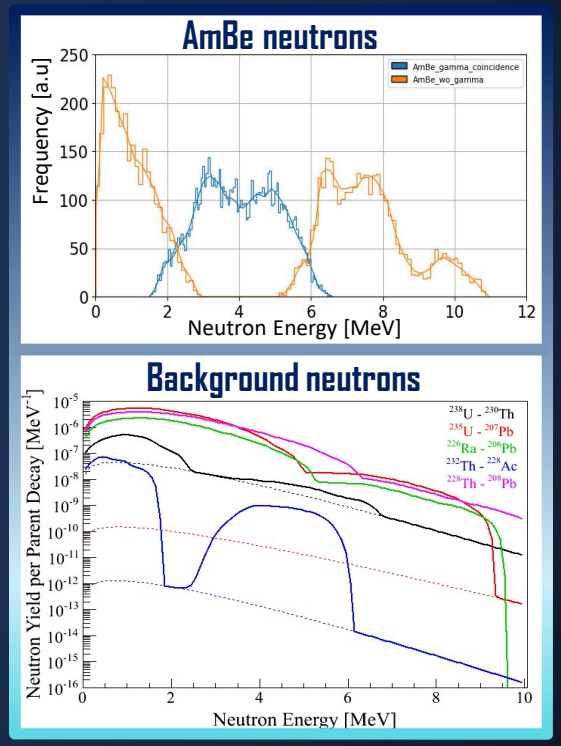

Dark Matter

XENONnT

Sim&Analysis

XENON

MC – DATA matching

AmBe source

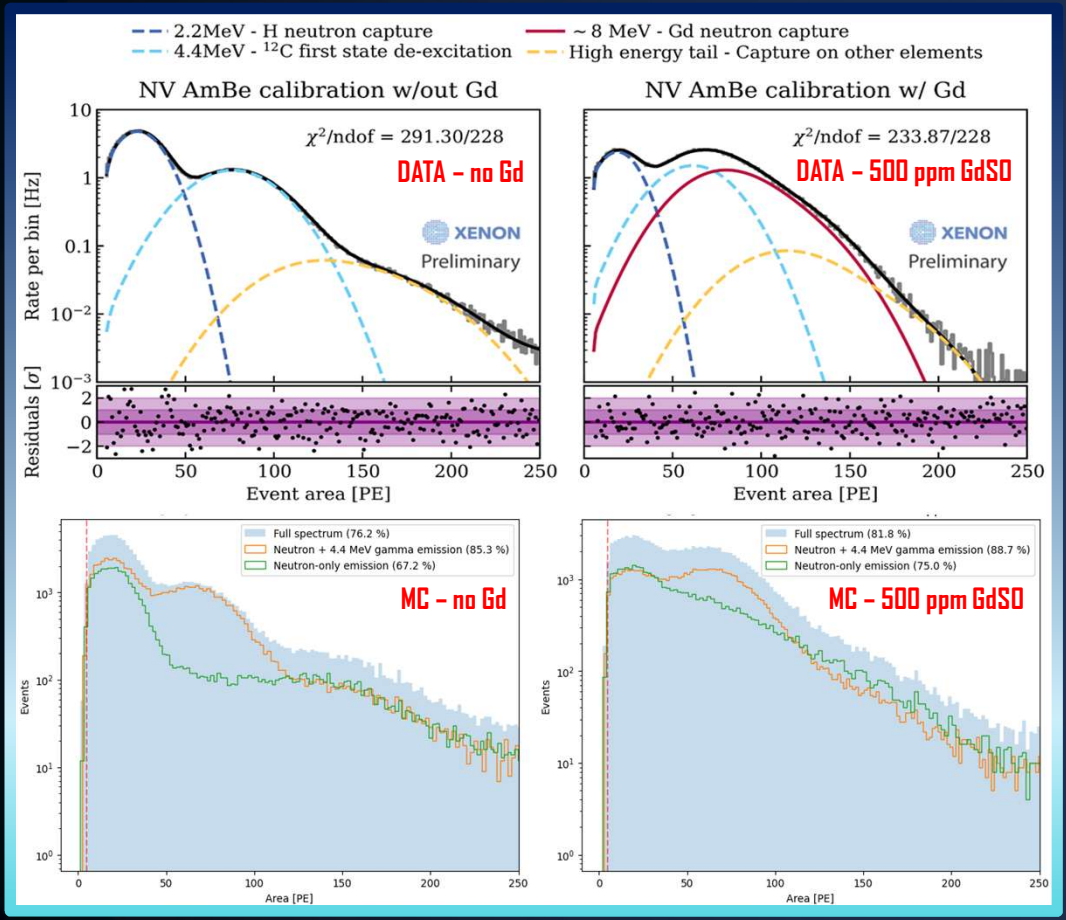

The **data** energy spectrum in the NV during AmBe calibration features various peaks:

- H-capture at 2.2 MeV (20 PE),
- AmBe gamma at 4.4 MeV (65 PE),
- Gd-capture at about 8 MeV (broad region at 80 PE).

MC data are produced separately for:

- neutron-only emission
- (neutron + γ) emission

Afterwards combined assuming various weights.

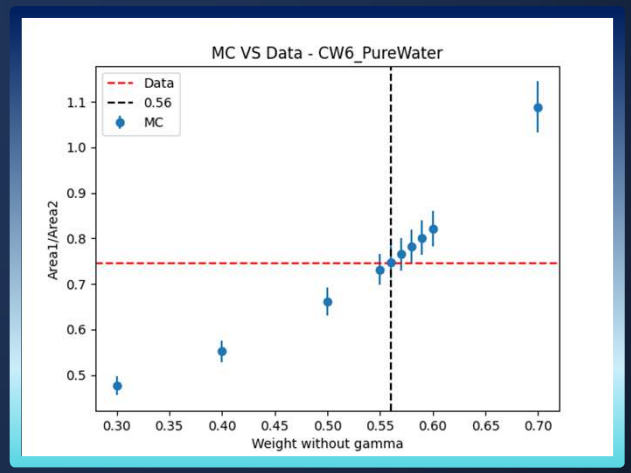

Best MC-data match for a (n+γ) emission in 44% of cases.

Dark Matter

XENONnT

Sim&Analysis

XENON

MC – DATA matching

Neutron capture time

The **neutron capture time** is the average time from the neutron emission to its capture. It is obtained by fitting the time distribution of the neutron capture events.

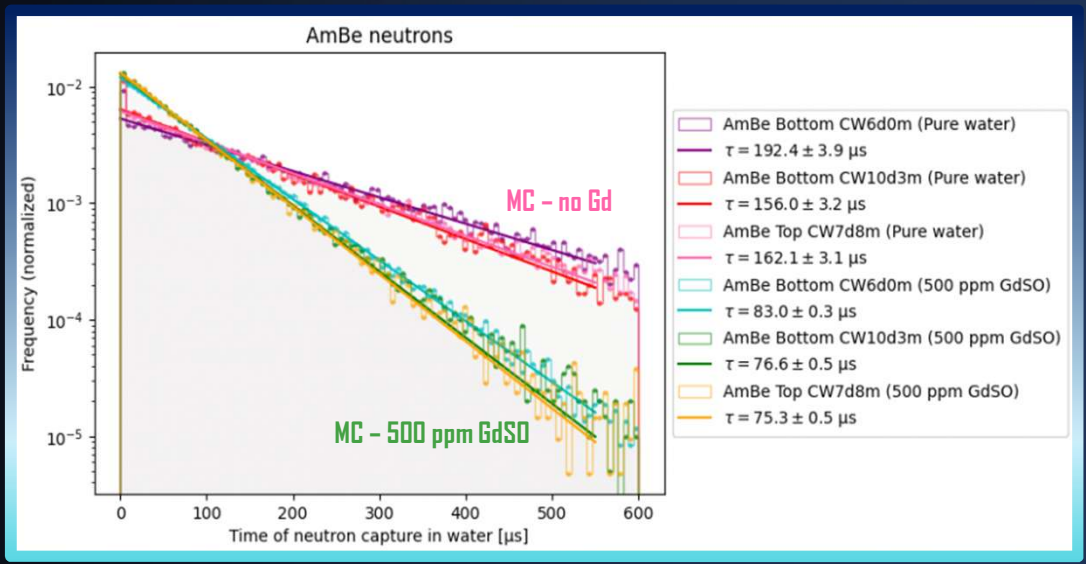

AmBe neutron capture time for different positions and in different conditions (pure water and 500 ppm GdSO concentration).

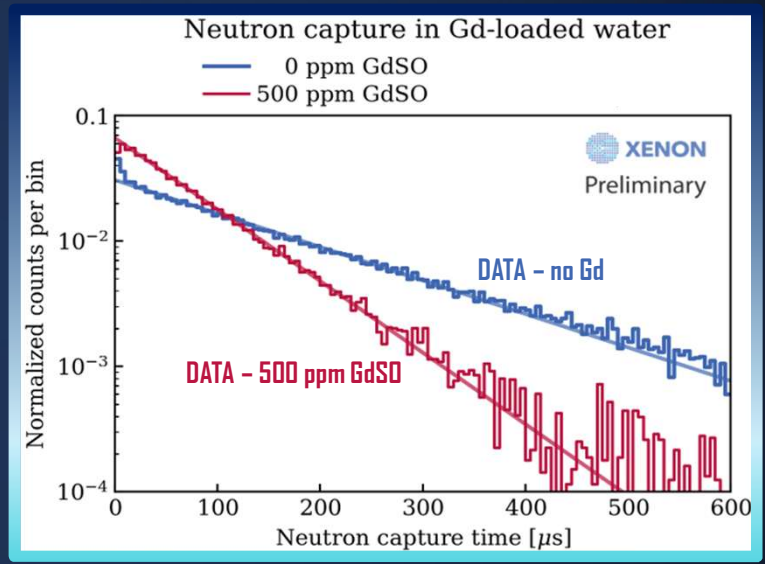

Neutron capture time decreased from (163 ± 3) μs in SR1 (0 ppm GdSO) to (75 ± 2) μs in SR2 (500 ppm GdSO).

MC – DATA matching

Neutron tagging efficiency

The **neutron tagging efficiency** quantifies the fraction of dangerous neutron signals in the TPC that are tagged by the nVeto.

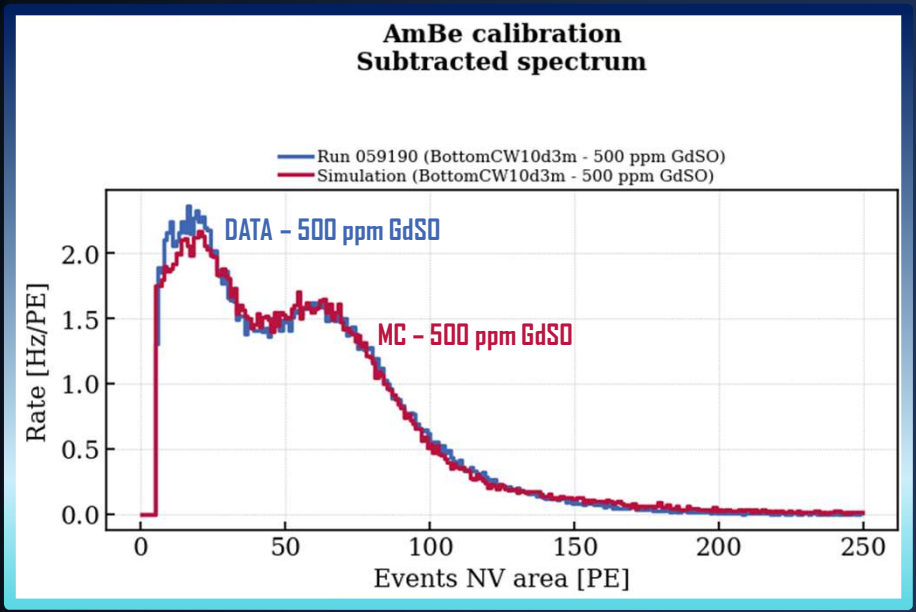

Comparison between data and MC energy spectra in the NV. Only the NV selection cuts are applied (area ≥ 5 PE & multiplicity ≥ 5).

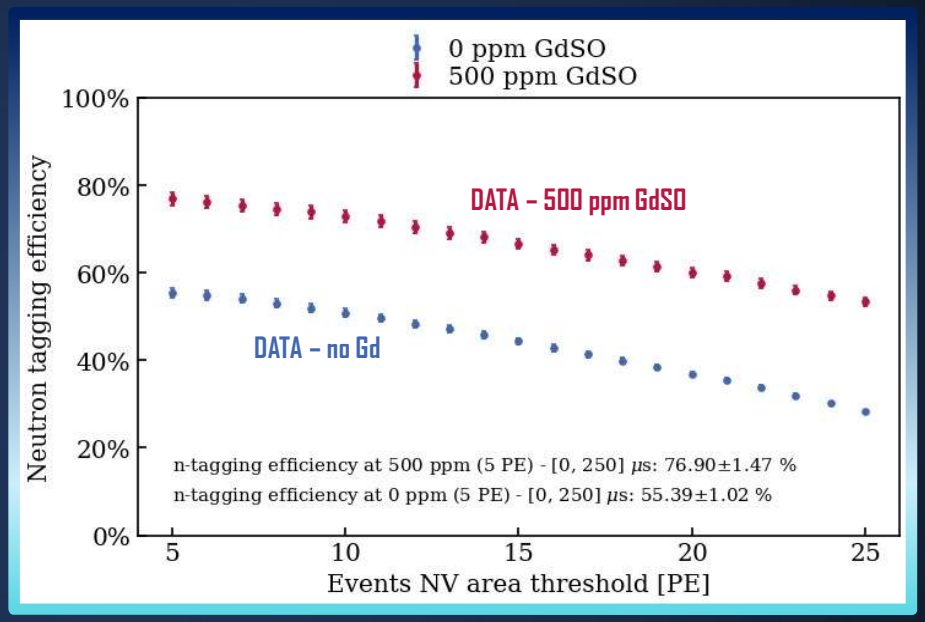

Neutron tagging efficiency measured with an AmBe calibration for a time window of [0, 250] μs, the one used in Science Run 0 analysis.

After Gd-doping (500 ppm of GdSO) the **neutron background** is **reduced by a factor 2**.

Dark Matter

XENONnT

Sim&Analysis

XENON

SUMMARY AND CONCLUSIONS

- **AmBe source characterization**: best MC-data match for a n+γ emission in 44% of cases.
- **MC-DATA**: good agreement.
- **Neutron capture time**: reduced from (163 ± 3) μs in SR1 (0 ppm GdSO) to (75 ± 2) μs in SR2 (500 ppm GdSO).
- **Neutron tagging efficiency**: improvement with the current 500 ppm concentration of Gd-salt and background reduced by a factor 2.
- **FUTURE**: with the goal concentration of 5000 ppm of Gd-salt in XENONnT or with the new XLZD experiment, we can reach an 85% neutron tagging efficiency, reducing further the neutron background.

XENONnT (2020)
6 t Xe target

XLZD
60 t Xe target

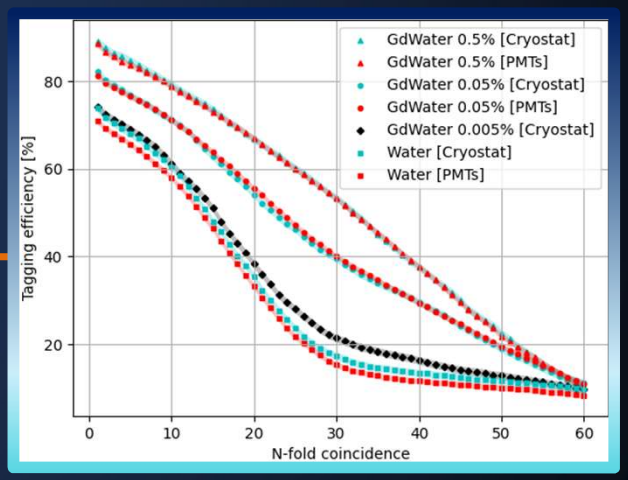

Thank you for your attention

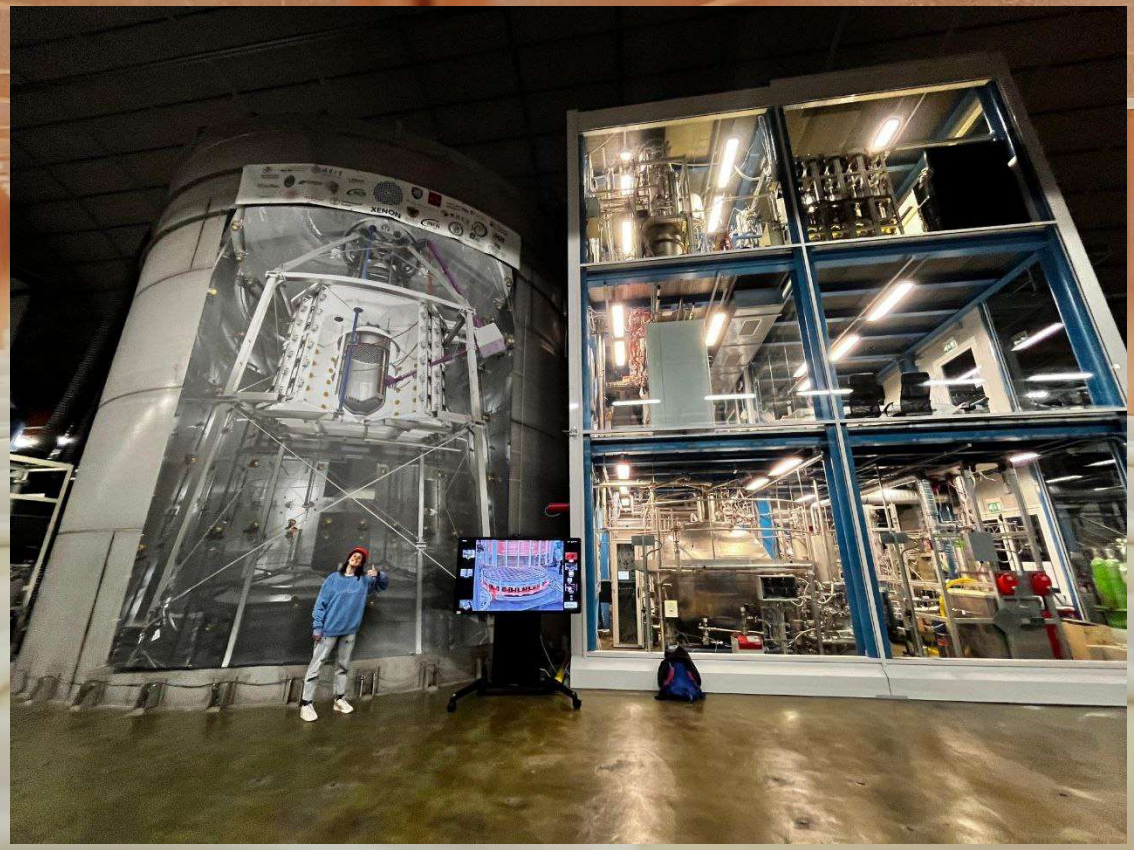

Photo credit: **Luigi Di Carlo for the XENON Collaboration**

XENON

www.xenonexperiment.org
xe-pr@lngs.infn.it

facebook.com/XENONexperiment

instagram.com/xenon_experiment

twitter.com/xenonexperiment

Backup slides

TPC working principle

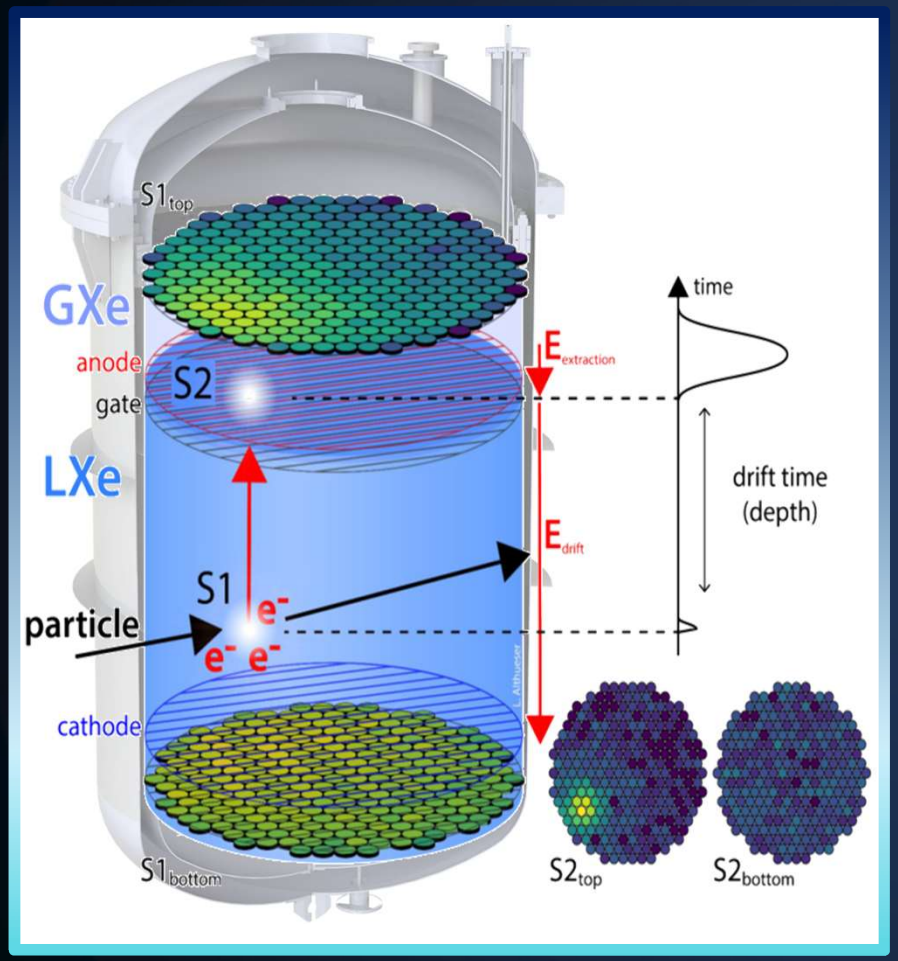

Electronic Recoil (ER)

Nuclear Recoil (NR)

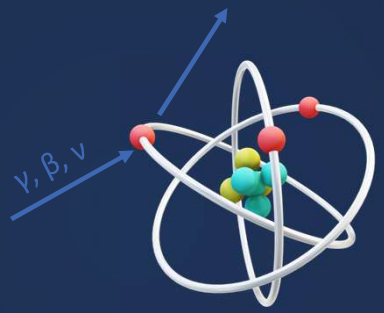

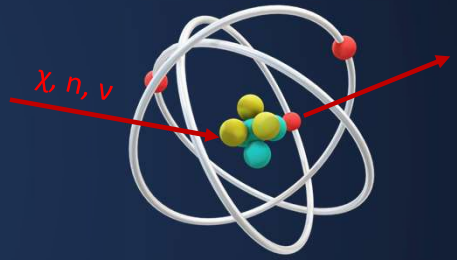

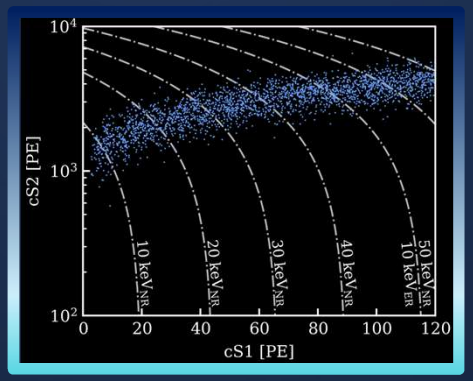

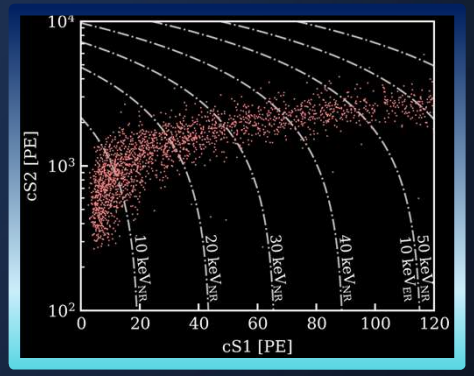

Dark Matter

XENONnT

Sim&Analysis

XENON

Hitlet Simulator

The HitSim is designed as a fast and efficient simulator for generating NV hitlets and events, based on the principle of delta pulse PMT signals.

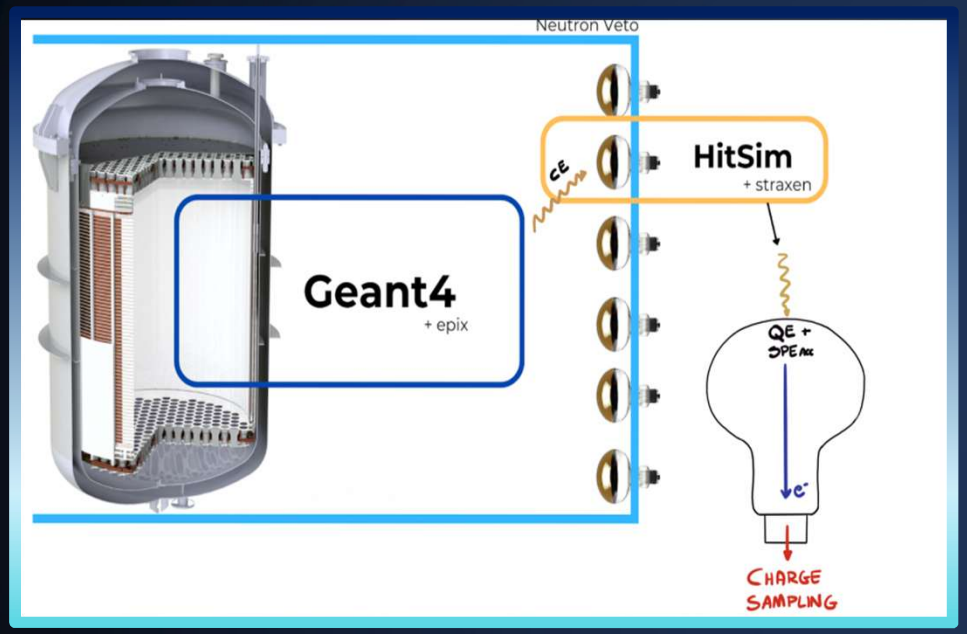

Simulated hits undergo a series of steps (≈ real γ):

1. In PMT conversion of γ into PE at photocathode (**QE(λ)**)
2. PE should be collected at the first dynode of the amplification stage (**CE**)
3. If PE is collected, sampling of the charge for each hits (**SPE model**)

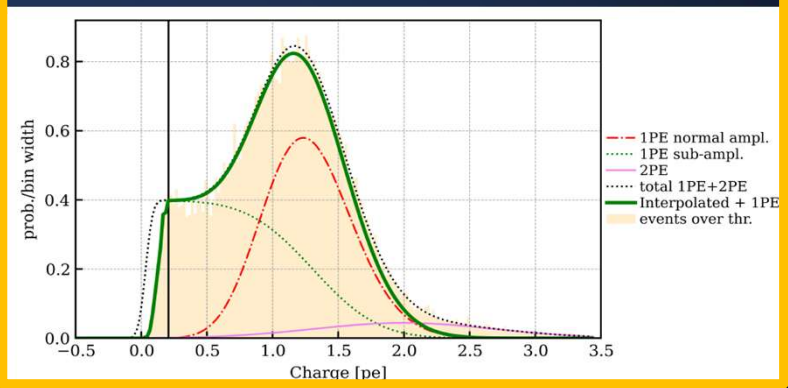

Geant4

Physics processes simulated

γ →

HitSim

Determine if γ converted into a PE and detected

→ ? →

Simulated signal with charge and timing fully analogous to real data

Dark Matter

XENONnT

Sim&Analysis

XENON

Calibration of the Neutron Veto

AmBe source emits neutrons through α-capture reaction $^{9}Be(\alpha, n)^{12}C$, its key feature is the emission of a **4.4 MeV gamma together with a neutron in about 50% of cases**.

AmBe calibration coincidences

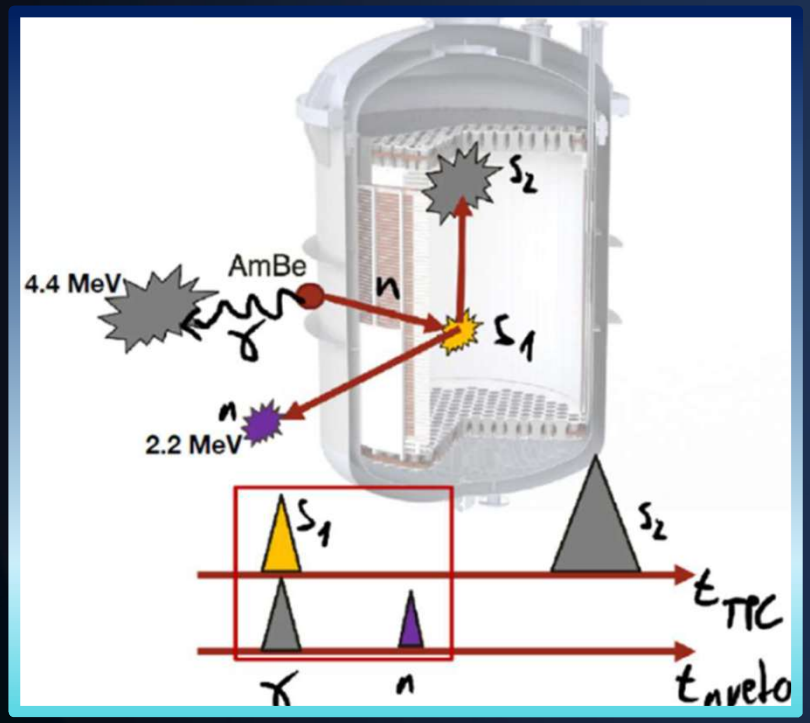

Strategy

With a small coincidence time-window (100 ns) we look for:

- TPC: Single Scatter Nuclear Recoil,
- nVeto: 4.4 MeV gamma from AmBe (trigger for neutron emission).

In the following time-window (up to 600 μs) we look for the neutron capture in nVeto:

- 2.2 MeV gamma for captures on H,
- About 8 MeV in total for captures on Gd.

Dark Matter

XENONnT

Sim&Analysis

XENON

MC – DATA matching

Neutron event rate

The **neutron event rate** consists in the number of observed events in the nVeto: in Table below, we compare the rate of observed events in the nVeto with the AmBe source at three positions: Top CW7d8, Bottom CW10d3, and Bottom CW6d0.

Source	Relative increase of neutron capture rate (0 VS 500 ppm GdSO)	
	Data	MC
Top CW7.8	+11.2%	+12.5%
Bottom CW10.3	+9.7%*	+11.5%
Bottom CW6.0	+1.5%	+3.6%

*(50 ppm GdSO)

There is a consistent agreement in the rate improvement after Gd insertion for all the positions.

MC – DATA matching

Neutron captured on H and Gd

We investigated the **fraction of neutrons captured on H, Gd, and other detector** materials. In Table below are reported values concerning three positions in two different concentrations (0 ppm and 500 ppm) of Gd-salt: Bottom CW6d0, Bottom CW10d3, and Top CW7d8.

Source	Pure water	500 ppm GdSO	Relative increase
AmBe - Bottom CW6d0	98.1%	98.9%	+0.8%
AmBe - Bottom CW10d3	56.3%	66.7%	+18%
AmBe - Top CW7d8	59.3%	68.9%	+16%

A significant increase is observed with Gd, particularly in the Bottom CW10d3 and Top CW7d8 positions (closer to the cryostat).

Furthermore, an analysis was conducted to determine how many **neutron captures** occurring in water were **on Gd or H** in the presence of 500 ppm GdSO. In Table below are reported values concerning three positions: Bottom CW6d0, Bottom CW10d3, and Top CW7d8.

Source	Relative fraction captured on Gd	Relative fraction captured on H
AmBe - Bottom CW6d0 [500 ppm]	62.4%	35.0%
AmBe - Bottom CW10d3 [500 ppm]	63.3%	34.3%
AmBe - Top CW7d8 [500 ppm]	63.1%	34.4%

Of the total neutron captures: ~ 63% occur on Gd, ~ 34% on H, and the rest mainly on O.
These values agree with the predicted rate of ~ 60% of captures happening on Gd.